

Biomass Assay and Product Characterization

he Process Chemistry Laboratories at Southwest Research Institute® (SwRI®) provide analytical support for both renewable energy and petrochemical process research projects. Bench-scale to demonstration-scale projects can be conducted at SwRI, or commercial-scale at client facilities.

New products, feedstock, and processes may produce complex sample matrices that often require development of novel methods to appropriately characterize these materials. To evaluate new technologies, SwRI staff carefully measure the physical and chemical properties and characteristics of biomass feedstock and its products.


Routine analyses and methodologies may not determine all the necessary characteristics of the sample or process. Following industry trends, SwRI has developed biomass assay capabilities which include animal or vegetable glyceride and fatty acid classification, sugar and cellulose characterization, and lignin breakdown product examinations.

Capabilities

- · NREL LAPs and ASTM testing
- · Multi-detector GC & GCMS
- · Multi-detector HPLC system

Analytical categories


- Organic acids
- · Carbohydrates, cellulose, hemicellulose
- · Poly-substituted phenols (e.g., in lignin breakdown products)
- · Lignol assay: sinapyl alcohol, confieryl alcohol, coumaryl alcohol
- Fatty acid methyl esters, free fatty acids, and mono-, di-, and tri-glycerides
- · Ash and moisture content
- · Dissolved solids
- Extractives
- · Simultaneous anion and cation
- Porphyrins
- · Normal and reversed phase HPLC

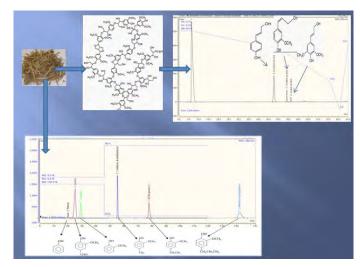

SwRI applies HPLC methods to analyze of lignin breakdown products: lignol assay (sinapyl alcohol, confieryl alcohol, and coumaryl alcohol), and poly-substituted phenolic assay.



The HPLC (high-performance liquid chromatography) system is equipped with three detectors: variable wavelength (VW) UV-vis, corona-charged aerosol detector (CAD), and refractive index (RI).



SwRI generates HPLC analysis of free fatty acids and mono-, di-, and triglyceride content in animal fat.



SwRI scientists conduct microbial field assays.

SwRI set up a gas chromatographic system to support a 24/7 pilot demonstration unit. The specialized system contains heated valve enclosures (top) in which remotecontrolled valves deliver a target sample stream to a specific GC instrument.



We welcome your inquiries.

For additional information, please contact:

Bill Barclay Manager, Process Chemistry 210-522-5169 william.barclay@swri.org

Monica Medrano Research Engineer, Fuels and Energy Development (210) 522-5240 monica.medrano@swri.org

Chemical Engineering Department
Chemistry and Chemical Engineering Division

Southwest Research Institute 6220 Culebra Road • PO Drawer 28510 San Antonio, Texas 78228-0510







Accelerated shelf-life study of bio-derived oil determines product stability (left to right: t=0, t=24, t=44 hours).



characterization tests



fuelsenergydev.swri.org

Southwest Research Institute is an independent, nonprofit, applied engineering and physical sciences research and development organization using multidisciplinary approaches to problem solving. The Institute occupies 1,200 acres in San Antonio, Texas, and provides more than 2 million square feet of laboratories, test facilities, workshops, and offices for nearly 3,000 employees who perform contract work for industry and government clients.

Find us on









SwRI Business Development • San Antonio, Texas • (210) 522-2122 • bd@swri.org © 2016 Southwest Research Institute. All rights reserved.

An Equal Opportunity/Affirmative Action Employer • Race/Color/Religion/Sex/Sexual Orientation/ Gender Identity/National Origin/Disabled/Veteran • Committed to Diversity in the Workplace

Designed & printed by SwRI MPS 01-0316 JCN 254411 bl

